

Miniature Circuit Breakers

DIN rail mounting

CE 10000
3

CE
Certificate




BKH 2P

BKH type (High rupturing capacity)

Technical data


Standard	Confirming to IEC 60947-2
Approval	CCC, SEMKO CB, CE, SABS
Protection	Overload and short circuit
Rated current	63, 80, 100, 125A
Rated voltage	1pole 230VAC 50/60Hz 2, 3, 4pole 400VAC 50/60Hz
Breaking capacity	10kA
Characteristic	C, D curve
Number of poles	1P, 2P, 3P, 4P
Type of trip	Thermal magnetic release
Type of terminal	Lug type
Terminal capacity	Cables up to 50mm ²
Installation	Mounting on 35mm DIN rail
Width	27mm per pole
Electrical endurance	1,500 operations

C curve

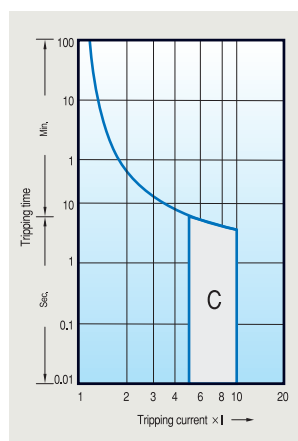

Pole	In	Model	Order No.	Pack. unit (Pcs.)	Price
1P	63A	BKH 1P C63A	06110329R0	72	
	80A	BKH 1P C80A	06110330R0	72	
	100A	BKH 1P C100A	06110331R0	72	
	125A	BKH 1P C125A	06110332R0	72	
2P	63A	BKH 2P C63A	06110337R0	36	
	80A	BKH 2P C80A	06110338R0	36	
	100A	BKH 2P C100A	06110339R0	36	
	125A	BKH 2P C125A	06110340R0	36	
3P	63A	BKH 3P C63A	06110345R0	24	
	80A	BKH 3P C80A	06110346R0	24	
	100A	BKH 3P C100A	06110347R0	24	
	125A	BKH 3P C125A	06110348R0	24	
4P	63A	BKH 4P C63A	06110361R0	18	
	80A	BKH 4P C80A	06110362R0	18	
	100A	BKH 4P C100A	06110363R0	18	
	125A	BKH 4P C125A	06110364R0	18	


D curve

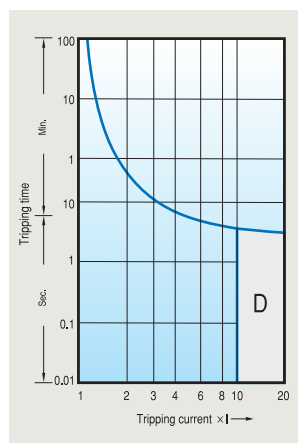

Pole	In	Model	Order No.	Pack. unit (Pcs.)	Price
1P	63A	BKH 1P D63A	06110333R0	72	
	80A	BKH 1P D80A	06110334R0	72	
	100A	BKH 1P D100A	06110335R0	72	
	125A	BKH 1P D125A	06110336R0	72	
2P	63A	BKH 2P D63A	06110341R0	36	
	80A	BKH 2P D80A	06110342R0	36	
	100A	BKH 2P D100A	06110343R0	36	
	125A	BKH 2P D125A	06110344R0	36	
3P	63A	BKH 3P D63A	06110349R0	24	
	80A	BKH 3P D80A	06110350R0	24	
	100A	BKH 3P D100A	06110351R0	24	
	125A	BKH 3P D125A	06110352R0	24	
4P	63A	BKH 4P D63A	06110365R0	18	
	80A	BKH 4P D80A	06110366R0	18	
	100A	BKH 4P D100A	06110367R0	18	
	125A	BKH 4P D125A	06110368R0	18	

Characteristics curves & temperature compensation

BKH

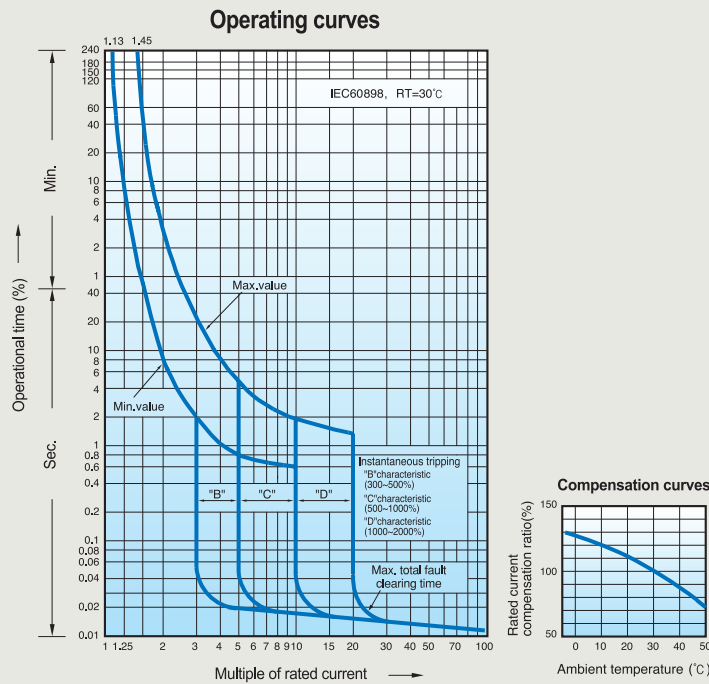

1. BKN, BKN-b, BKN-c, BKP, RKP, RKS, RKS-b
(Temperature compensation table)(IEC60 898-1)

In(A)	20 °C	25 °C	30 °C	35 °C	40 °C	45 °C	50 °C	55 °C	60 °C
1	1,05	1,02	1,0	0,98	0,95	0,93	0,9	0,88	0,85
2	2,08	2,04	2,0	1,96	1,92	1,88	1,84	1,8	1,74
3	3,18	3,09	3,0	2,91	2,82	2,7	2,61	2,49	2,37
4	4,24	4,12	4,0	3,88	3,76	3,64	3,52	3,36	3,24
6	6,24	6,12	6,0	5,88	5,76	5,64	5,52	5,4	5,3
10	10,6	10,3	10,0	9,7	9,3	9,0	8,6	8,2	7,8
16	16,8	16,5	16,0	15,5	15,2	14,7	14,2	13,8	13,3
20	21,0	20,6	20,0	19,4	19,0	18,4	17,8	17,4	16,8
25	26,2	25,7	25,0	24,2	23,7	23,0	22,2	21,5	20,7
32	33,5	32,9	32,0	31,4	30,4	29,8	28,4	28,2	27,5
40	42,0	41,2	40,0	38,8	38,0	36,8	35,6	34,4	33,2
50	52,5	51,5	50,0	48,5	47,4	45,5	44,0	42,5	40,5
63	66,2	64,9	63,0	61,0	58,0	56,7	54,2	51,7	49,2

I1: 113% In, I2: 145% In according to IEC60 898-1

2. BKH
(Temperature compensation table)(IEC60 947-2)

In(A)	20 °C	25 °C	30 °C	35 °C	40 °C	45 °C	50 °C	55 °C	60 °C
6	6,38	6,28	6,19	6,1	6	5,89	5,79	5,68	5,58
10	11	10,7	10,5	10,3	10	9,5	9	8,7	8,5
16	17	16,5	16	16	16	15,5	15	14,5	14
20	22,5	22	21	20,5	20	19	18,5	18	17
25	27	26,5	26	25,5	25	24	23	22,5	22
32	36	35	34	33	32	31	29,5	28	27
40	45,5	44	43	41,5	40	38,5	37	35	33,5
50	57,5	56	54	52	50	48	45,5	43,5	41
63	72,5	70,5	68	65,5	63	60,5	57,5	54,5	51,5
80	92	89	86	83	80	76,5	73,5	69,5	66
100	115	111	108	104	100	96	91,5	87	82,5
125	143,8	138,8	135	130	125	120	114	108,8	103,1

I1: 105% In, I2: 130% In according to IEC60 947-2

Overall dimensions

BKH

